

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 October 2004 (28.10.2004)


PCT

(10) International Publication Number
WO 2004/091460 A1

- (51) International Patent Classification⁷: A61G 13/00, J13, Scenic Villas, 20 Scenic Villa Drive, Pokfulam, Hong Kong (CN).
A61F 5/30
- (21) International Application Number: PCT/CN2004/000360
- (22) International Filing Date: 15 April 2004 (15.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/463,186 16 April 2003 (16.04.2003) US
- (71) Applicant (for all designated States except US): THE UNIVERSITY OF HONG KONG [CN/CN]; G18, Eliot Hall, Pokfulam Road, Hong Kong (CN).
- (72) Inventors: KONG, Kamfu, James; 2A, Excelsior Court, 83 Robinson Road, Mid-Levels, Hong Kong (CN). CHIEN, Ping, Eric; Flat 1747, Tower 7, 88 Tai Tam Reservoir Road, Hong Kong (CN). LUK, Dipkei, Keith;
- (74) Agent: CHINA PATENT AGENT (H.K.) LTD.; 22/F, Great Eagle Centre, 23 Harbour Road, Wanchai, Hong Kong (CN).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: DEVICE FOR PROVIDING A LATERALIZATION EFFECT

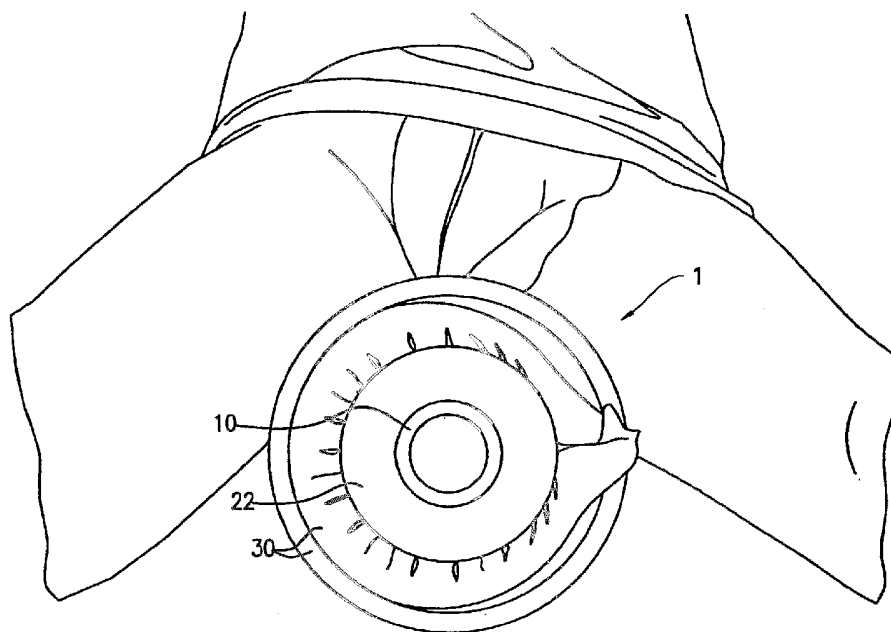

(57) Abstract: The invention relates to a lateralization device, which includes a supporting member (10) adapted to be supported in fixed position: a lateralization member (20) mounted onto the supporting member (10) and expanding laterally therefrom to provide a lateralization effect, where the lateralization effect can be varied as desired.

WO 2004/091460 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Device for providing a lateralization effect

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This patent application claims the benefit of United States Provisional
5 Patent Application No. 60/463,186 filed April 16, 2003.

FIELD OF THE INVENTION

[0002] The present invention relates generally to a device and method for
providing a lateralization effect. In particular, the present invention relates to a device
and method for providing an adequate lateralization vector force in a medical procedure.

10 BACKGROUND OF THE INVENTION

[0003] Hip arthroscopy is a common procedure for diagnosing and/or treating
various hip conditions. Both supine and lateral approaches have been used in such a
procedure. When performing such a procedure on a fracture table, complications can
often occur, such as peroneal maceration and pudendal nerve palsy secondary to prolonged
15 traction. U.S. Patent No. 5,515,562 to Miller et al. discloses a perineal pad for a patient
undergoing surgical procedures using manipulation or traction of the patient's lower
extremities.

[0004] Devices for hip protection and stabilization are described, for example in
U.S. Patent No. 4,641,641 to Strock, as a protective appliance having an annular pad
20 made of a resilient material. Adhesive strips are provided on one surface of the pad to
secure the pad to the skin. The protective appliance also has a rigid dome-shaped shield
carried in opposed pockets formed on the outer surface of the pad. Another known device
for hip stabilization is disclosed in U.S. Patent No. 5,383,920 to Sikes, which discloses a
rigid outer shell and a cushioned pad on the inner surface of the shell. The cushioned pad
25 is placed next to the joint area to be protected.

[0005] Body padding devices are also known. U.S. Patent No. 4,272,850 to Rule
discloses body protective pads that have an undersurface facing the body and a scored top
surface in the pad to conform to the body area. In addition, U.S. Design Patent No.
347,103 to Berry discloses another device for hip padding, which consists of a pad used
30 externally to provide a cushioning effect to the hip region.

SUMMARY OF THE INVENTION

[0006] The present invention relates to a device and a method for providing and/or maintaining a lateralization effect. For example, the lateralization effect can be used to position the hip and the femur in a desired relationship during a hip arthroscopy.

5 The lateralization device can comprise a supporting member, which can be adapted to be maintained in a fixed position. A lateralization member can provided and adapted to at least partially surround the supporting member and be mounted thereto. The lateralization member can be formed and/or adjusted to provide a lateralization effect, such as for the user's hip joint in a hip arthroscopy.

10 [0007] Optionally, the lateralization device can comprise a protection member surrounding the lateralization member. The protection member can be inflatable or gel-filled, or otherwise formed to provide a cushioning and/or protective effect for the user. The protection member can be removed and exchanged.

[0008] When using the lateralization device, the supporting member can be installed, such as on a support frame (e.g., a fracture table), to support the lateralization member. The lateralization member can be mounted onto the supporting member either before or after the supporting member is mounted in a fixed position. The lateralization member is capable of providing a lateralization effect. Additionally or alternatively, the lateralization member can be adapted to provide a variable lateralization effect.

20 [0009] According to another aspect, the present invention relates to a method for providing a desired lateralization effect, such as for the user's hip joint in a hip arthroscopy. The method can comprise providing a lateralization. Additionally or alternatively, the method can comprise varying the lateralization to reach a desired lateralization effect. The method can also comprise maintaining the desired lateralization effect.

BRIEF DESCRIPTION OF THE DRAWINGS

The detailed description of the present invention will be better understood in conjunction with the accompanying drawings which are for illustrative purposes only. The present invention is not limited to the embodiments shown in such drawings.

30 Figure 1 illustrates a first embodiment of the lateralization device.

Figure 2 illustrates the supporting member of the lateralization device as shown in Figure 1.

Figure 3 illustrates the lateralization member of the lateralization device as shown in Figure 1.

5 Figure 4 illustrates an alternative embodiment of the lateralization device in its use position.

Figure 5 illustrates the lateralization device of Figure 4 with a protection member surrounding the lateralization member.

10 Figure 6 illustrates the lateralization device of Figure 4 with an alternative protection member surrounding the lateralization member.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0010] Exemplary lateralization devices and methods embodying the principles of the present invention are shown throughout the drawings. In the following description of various embodiments of the lateralization device, like reference numbers represent like elements or components and redundant description is omitted.

[0011] The present invention can provide a device and a method that is capable of providing an adequate lateralization effect. Additionally or alternative, the present invention can provide a device and a method capable of providing a variable lateralization effect. In one exemplary embodiment, the lateralization device 1 is capable of providing and/or maintaining a desirable lateralization and/or cushioning effect, such as for a patient's body portion in a medical procedure.

[0012] The lateralization device 1 can be formed in various manners. In one exemplary embodiment, such as shown in Figure 1, the lateralization device 1 can comprise a supporting member 10, which can be adapted to be supported on a medical support frame, such as mounted on a fracture table (not shown). A lateralization member 20 can be provided to be supported and mounted on the supporting member 10 as will be described in details below. The lateralization member 20 can be formed to be capable of providing a desired lateralization effect for the patient as will be described in greater details below.

30 [0013] The supporting member 10 of the lateralization device 1 can be formed in various manners to support and/or mount the lateralization member 20 on a support frame. For example, the supporting member 10 can comprise a post member 12 for engaging a

complimentary structure on the lateralization member **20** as described below. In one exemplary embodiment, the supporting member **10** can comprise an extension portion **14** provided to fit in a corresponding cavity structure (not shown) in the support frame, such as a fracture table. In another exemplary embodiment, the supporting member **10** can be mounted onto the support frame in a fixed position. For example, the extension portion **14** can be fixed to the fracture table by conventional fasteners, such as knots, bolts, and the like, (not shown) to secure the lateralization device **1** on the fracture table. It will be appreciated that various alternative embodiments of mounting the supporting member **10** are still within the scope of the present invention.

[0014] In one exemplary embodiment, the supporting member **10** can be formed in various manners to support the lateralization member **20** to provide a desired lateralization effect. For example, the supporting member **10** can be in the form of the post member **12** adapted to fit in a complimentary recessed portion formed on the lateralization member **20**. In an exemplary embodiment, such as shown in Figure 2, the supporting member **10** can be a substantially cylindrical member with various cross-sectional shapes. For example, the supporting member **10** can have a substantially circular, oval, or rectangular cross-sectional shape.

[0015] In another exemplary embodiment, the supporting member **10** can comprise a substantially circular outer wall **16** to be inserted in a circular cut-out portion in the lateralization member **20** as will be discussed below. In an exemplary embodiment, such as shown in Figure 2, an interference fitting **18** can be formed on the outer wall **16** for engaging with a corresponding interference fitting **28** formed on the lateralization member **20** as will be discussed below. It will be appreciated that various alternative embodiments of the supporting member **10** and the post member **12** are still within the scope of the present invention.

[0016] The lateralization member **20** can be formed and/or adjusted in various manners to provide an adequate and/or desired lateralization effect for a user. In one exemplary embodiment, the lateralization member **20** can be formed with or adjusted to expand in a lateral direction to a sufficient lateral dimension. In an exemplary embodiment, the lateralization member **20** can maintain such dimension or expansion. In another exemplary embodiment, the lateralization member **20** can be formed to have sufficient lateral dimension. For example, the lateralization member **20** can be formed so that it is capable of moving the user's hip portion laterally outwardly to cause the hip

joint to deflect from its normal position, thereby facilitating the hip arthroscopy. In a further exemplary embodiment, the lateralization member **20** can be made of various materials that can resist the pressure exerted thereon during a normal use without yielding.

[0017] In one exemplary embodiment, the lateralization member **20** can be formed in various shapes. In an exemplary embodiment, the lateralization member **20** can comprise a cylindrical member **22** with various cross-sectional shapes, such as circular, oval, or other curved shapes. For example, the lateralization member **20** can have a substantially circular cylindrical shape. In an exemplary embodiment, the cylindrical member **22** can have a smooth outer wall. It will be appreciated that various alternative embodiments of the cylindrical member **22** are still within the scope of the present invention.

[0018] In one exemplary embodiment, the lateralization member **20** can have a recessed or cut-out portion **24** formed by an inner wall **26**. The cut-out portion **24** can be adapted to fit over the supporting member **10** to be supported thereon. In an exemplary embodiment such as shown in Figure 3, the cut-out portion **24** can extend longitudinally through the lateralization member **20**. In another exemplary embodiment, the cut-out portion **24** can have a cylindrical shape with various cross-sectional shapes. For example, the cut-out portion **24** can be a substantially circular cylindrical opening, such as for fitting onto the circular post member **12**. It will be appreciated that various alternative embodiments of the shape of the cut-out portion **24** are still within the scope of the present invention.

[0019] In another exemplary embodiment, the cut-out portion **24** can be located at various positions on the lateralization member **20**. For example, the cut-out portion **24** can be positioned in the center of a circular cylindrical lateralization member **20** to provide a uniform lateralization. In one exemplary embodiment, the cut-out portion **24** can be formed in such a position on the lateralization member **20** so as to provide a variable lateralization. In an exemplary embodiment such as shown in Figure 3, the cut-out portion **24** can be formed in an eccentric or off-set position of the lateralization member **20** where the distance between such cut-out portion **24** and a point on the outer circumference of the lateralization member **20** varies. In another exemplary embodiment where the lateralization member **20** can have a substantially circular cylindrical shape, the cut-out portion **24** can be positioned away from the center of the lateralization member **20**. The varying radial distance between the cut-out portion **24** and the outer circumference of

the lateralization member **20** can provide a variable lateralization effect as will be described below. It will be appreciated that various alternative embodiments of the location of the cut-out portion **24** and the form of the lateralization member **20** are still within the scope of the present invention.

5 **[0020]** In a further exemplary embodiment, the lateralization member **20** can comprise interference fittings **28** on the inner wall **26**. In an exemplary embodiment, the interference fittings **28** can be formed to be complementary to the interference fittings **18** on the outer wall **16** of the supporting member **10**. In one exemplary embodiment, the interference fittings **28** on the inner wall **26** can be engaged with the interference fittings
10 **18** on the outer wall **16** to mount the lateralization member **20** on the supporting member **10**. In another exemplary embodiment, the interference fittings **18** and **28** can assist to provide a variable lateralization effect as will be described below. It will be appreciated that various alternative embodiments of forming the lateralization member **20** are still within the scope of the present invention.

15 **[0021]** The lateralization member **20** can be supported by the supporting member **10** in various manners to form the lateralization device **1**. In an exemplary embodiment such as shown in Figure 1, the lateralization member **20** can be provided, which can at least partially surround the supporting member **10** and be supported thereby. In another exemplary embodiment, the cut-out portion **24** of the lateralization member **20** can be
20 made to fit onto the post member **12** of the supporting member **10** to assemble the lateralization device **1**. Various means can be used to restrain the relationship between the supporting member **10** and the lateralization member **20**. In an exemplary embodiment, various conventional fasteners can be used to the position of the lateralization member **20** in relation to that of the supporting member **10**.

25 **[0022]** In another exemplary embodiment, the supporting member **10** and the lateralization member **20** can be provided with complimentary engaging elements to restrain their relative movement to each other. For example, the inner wall **26** of the lateralization member **20** can be provided with interference fittings **28**, which are complementary to the interference fittings **18** on the outer wall **16** of the supporting
30 member **10**. The complementary interference fittings **18** and **28** can allow the lateralization member **20** to join the supporting member **10** and be supported thereby.

[0023] In a further exemplary embodiment, such as shown in Figures 4 to 6, the lateralization member 20 can comprise a padding member 30. The padding member 30 can be so formed that, after being mounted onto such as the supporting member 10, the padding member 30 is capable of providing a lateral support for a user's body portion, such the user's femur. Additionally or alternatively, the padding member 30 can be formed that at least a portion thereof is capable of yielding to, without bottoming out, a pressure exerted thereon so as to provide a cushioning effect to the user's body portion. In one exemplary embodiment, the padding member 30 can be made of a yieldable material, such as a rubber like material. In another exemplary embodiment, the padding member 30 can be formed to be filed with a flowable or deformable material of any solid, liquid, gaseous, or gel state. In an exemplary embodiment, the padding member 30 can be a jelly pad 32. It will be appreciated that various alternative embodiments of forming the padding member 30 are still within the scope of the present invention.

[0024] In one exemplary embodiment, the padding member 30 can be adapted to at least partially wrap around the supporting member 10 and be mounted thereonto through various conventional means. For example, the padding member 30 can be directly mounted to the supporting member 10 by taping, bandaging, and the like. In an exemplary embodiment, the padding member 30 can completely wrap around the supporting member 10. In another exemplary embodiment, the padding member 30 can wrap around the supporting member 10 for more than one layer. In an exemplary embodiment where the padding member 30 is adapted to wrap around the supporting member 10 for one or more layers, the padding member 30 can be secured to itself by taping, bandaging, or other closure elements such as hook fasteners, Velcro fasteners, and the like. In a further embodiment, the padding member 30 can be used in combination with another lateralization member 20, such as a cylindrical member 22 mounted onto the supporting member 10. In an exemplary embodiment, the padding member 30 can be mounted onto either the supporting member 10, or the other lateralization member 20 or both in a similar manner. It will be appreciated that various alternative embodiments of mounting the padding member 30 are still within the scope of the present invention.

[0025] In another exemplary embodiment, a plurality of lateralization members 20 can be used to provide an adequate or desired lateralization effect. In one exemplary embodiment, such as shown in Figures 4 to 6, a first lateralization member 20 in the form of a cylindrical member 22 can be provided and mounted onto the supporting member 10.

A second lateralization member **20**, such as in the form of a padding member **30**, can be provided to at least partially wrap around and mounted onto the cylindrical member **22**. It will be appreciated that various alternative embodiments of forming the of forming the lateralization device **1** are still within the scope of the present invention.

5 **[0026]** Additionally or alternatively, the supporting member **10** and the lateralization member **20** can be assembled before the installation of the lateralization device **1**. In one exemplary embodiment, the lateralization member **20** can be assembled to the supporting member **10** after the installation of the supporting member **10**. For example, the supporting member **10** can be pre-installed on the fracture table. It will be
10 appreciated that various alternative embodiments of assembling the supporting member **10** and the lateralization member **20** are still within the scope of the present invention.

[0027] In another embodiment, the lateralization device **1** is capable of providing a variable lateralization effect. For example, the lateralization device **1** can be formed and/or adjusted in various manners to provide a variable lateralization effect as desired.
15 In an exemplary embodiment, the cylindrical member **22** of the lateralization member **20** can have an oval cross-section. The lateralization member **20** so formed is capable of a variable lateralization effect depending how the lateralization device **1** is oriented when being mounted on the support frame. For example, when the major diameter of the oval cylindrical member **22** is oriented in a lateral direction, the lateralization device **1** is
20 capable of providing a maximum lateralization effect. On the other hand, a maximum lateralization effect can be obtained by orienting the minor diameter of the oval cylindrical member **22** in a lateral direction. It will be appreciated that variable lateralization effect can be achieved by orienting such an oval cylindrical member **22** in different directions.

25 **[0028]** In another exemplary embodiment, such as shown in Figure 1, the supporting member **10** can be associated with the lateralization member **20** in an off-set relationship as described above. For example, the cut-out portion **24** can be formed in an off-set location in the lateralization member **20**. After assembling the two members **10** and **20**, the lateralization member **20** can be made to rotate around the supporting member
30 **10** to provide a variable lateralization effect.

[0029] In a further exemplary embodiment, the lateralization member **20**, which is in the form of a padding member **30**, can be formed to provide a variable lateralization

effect. In one exemplary embodiment, the size and number of the padding member **30** can be designed or selected to provide various degrees of lateralization effects. For example, a greater degree of lateralization effect is needed for an adult user, while a less degree of lateralization effect is more appropriate for a child user. In an exemplary
5 embodiment, a series of the padding members **30** of various thicknesses can be provided and interchanged with one another to provide a variable lateralization effect. In another exemplary embodiment, such as shown in Figures 4 and 5, a plurality of padding members **30** can be combined to provide a greater degree of a lateralization effect. In a further exemplary embodiment, such as shown in Figures 4 and 5, one or more padding
10 members **30** can be used in conjunction with a cylindrical member **22** to provide an adequate and/or variable lateralization effect.

[0030] In another exemplary embodiment, such as shown in Figures 4 and 5, a plurality of lateralization members **20** can be provided, which can be interchanged or combined to provide a desired and/or adequate lateralization effect. In an exemplary
15 embodiment, the lateralization member **20** can be fixed to the supporting member **10** by various conventional means to secure the desired lateralization. In another exemplary embodiment, different types of the lateralization members **20** can be combined and used together to provide a variable lateralization effect. For example, lateralization members **20** in the form of a circular cylindrical member **22** and a padding member **30** can be
20 joined together to afford a variable and comprehensive lateralization effect. It will be appreciated that the different combinations of the various lateralization members **20** can provide a variable lateralization effect.

[0031] In another exemplary embodiment, the lateralization member **20** can be adjusted or otherwise manipulated to provide a variable lateralization effect. For example,
25 the lateralization member **20** can be oriented in various directions in relation to the supporting member **10** to provide a variable lateralization effect. In an exemplary embodiment, such as shown in Figure 1, the inner wall **26** of the lateralization member **20** can be provided with interference fittings **28**, which are complementary to the interference fittings **18** on the outer wall **16** of the supporting member **10**. The
30 complementary interference fittings **18** and **28** can allow the lateralization member **20** to rotate in relation to the supporting member **10** to provide a desired lateralization. Such desired lateralization can be secured during the medical procedure through one or more conventional fasteners (not shown) in various conventional manners. It will be

appreciated that various alternative embodiments of providing a variable lateralization effect are still within the scope of the present invention.

[0032] If desired, a protection member **40** can be provided to at least partially wrap around and mounted onto the lateralization member **20** to afford a cushioning and/or protective effect to the user's body portion, such as the user's perineum. For example, the protection member **40** can wrap around at least a portion of the lateralization member **20**. In an exemplary embodiment, such as shown in Figure 1, the protection member **40** can be a sleeve-like member **42** surrounding the lateralization member **20**. The protection member **40** can be inflatable or filled with various fluids, such as gel and the like, or otherwise formed to provide a cushioning and/or protective effect. In another exemplary embodiment, such as shown in Figures 5 and 6, the protection member **40** can be a bandage material **44** wrapping and covering the lateralization member **20** for protection.

[0033] In one exemplary embodiment, the protection member **40** can be readily removed from the lateralization member **20**. In one exemplary embodiment, the protection member **40** can comprise a series protection member units (not shown) of different sizes, such as different thickness. Such different sized units of the protection member **40** can be interchangeable, such as to vary the cushioning and/or protective effect. In another exemplary embodiment, the bandage material **44** can be readily removed and exchanged after each use. It will be appreciated that various alternative embodiments of forming the protection member **40** are still within the scope of the present invention.

[0034] The lateralization device **1** can be used in various medical procedures to provide a lateralization effect. In an exemplary embodiment, the lateralization device **1** can be adapted to provide an adequate lateralization and/or cushioning effect for the patient's hip joint in a hip arthroscopy. For example, the lateralization device **1** can be used in conjunction with a fracture table to provide a hip lateralization in a hip arthroscopy. In one exemplary embodiment, the lateralization device **1** can be mounted onto a fracture table so that the lateralization member **20** can support a body portion of the user, such as the user's femur. In another exemplary embodiment, the lateralization device **1** can be mounted on the fracture table by inserting the extension portion **14** into a cavity structure in the fracture table. The lateralization device **1** can then be fixed to the fracture table in a conventional manner. It will be appreciated that various alternative embodiments of mounting the lateralization device **1** are still within the scope of the present invention.

[0035] After the lateralization device 1 is installed, the supporting member 10 and the lateralization member 20 can provide support and lateralization, such as for a user's body portion. In an exemplary embodiment, after the lateralization member 20 is assembled with the supporting member 10, the lateralization member 20 can provide a lateral support to the user's body portion. For example, the user can be positioned so that a body portion of the user lies against the lateralization member 20, which is capable of providing a lateral support to that body portion.

[0036] In one exemplary embodiment, the lateralization member 20 can be adapted to provide a lateral support for the patient's hip joint in a hip arthroscopy. For example, the user can be positioned so that the femur portion lies against the lateralization member 20, which is capable of providing a lateralization effect to the user's hip joint. In an exemplary embodiment, such as shown in Figures 4 to 6, the lateralization member 20 can be positioned to support the user near the crotch area during hip arthroscopy. It will be appreciated that other embodiments for using the lateralization device 1 are still within the scope of the present invention.

[0037] According to another aspect of the invention, a method is contemplated to provide a lateralization effect for a user's body portion. In one embodiment, the method can provide a desired lateralization and maintain the desired lateralization in various medical procedures. For example, in a hip arthroscopy, a lateralization effect can be provided so that the patient's hips can be forced laterally apart and further away from each other. It will be appreciated that the method can be applied to other body portions of a user to achieve a desired lateralization effect.

[0038] In another embodiment, the method is capable of providing a variable lateralization effect. In one exemplary embodiment, the method can comprise providing a first lateralization effect. The method can also comprise providing a second lateralization effect that differs from the first lateralization effect. In another exemplary embodiment, the method can comprise changing the lateralization till a desired lateralization effect is reached. For example, the lateralization can be changed between a minimum amount and a maximum amount. Additionally or alternatively, the lateralization can be changed gradually. In a further exemplary embodiment, the lateralization effect can be changed gradually to reach the desired amount. It will be appreciated that various alternative embodiments of providing the lateralization effect are still within the scope of the present invention.

[0039] Additionally or alternatively, the method can comprise maintaining a desired lateralization effect. Various means can be used to carry out the above method step. In an exemplary embodiment, the lateralization effect can be maintained by using a lateralization member capable of resisting a predetermined amount of force without yielding. In another exemplary embodiment, a lateralization device can be formed so that it requires an additional manipulation to vary the lateralization effect. Such a lateralization device is capable of maintaining a desired lateralization effect without the additional manipulation. It will be appreciated that various alternative embodiments of maintaining the lateralization effect are still within the scope of the present invention.

5 **[0040]** Optionally, the method can comprise providing a cushioning and/or protective effect, such as to the body portion of the user. In an exemplary embodiment, such cushioning and/or protective effect can be varied as desired.

[0027] It will be appreciated that the various features described herein may be used singly or in any combination thereof. Therefore, the present invention is not limited to only the embodiments specifically described herein. While the foregoing description and drawings represent a preferred embodiment of the present invention, it will be understood that various additions, modifications, and substitutions may be made therein without departing from the spirit and scope of the present invention. In particular, it will be clear to those skilled in the art that the present invention may be embodied in other specific forms, structures, arrangements, proportions, and with other elements, materials, and components, without departing from the spirit or essential characteristics thereof. One skilled in the art will appreciate that the invention may be used with many modifications of structure, arrangement, proportions, materials, and components and otherwise, used in the practice of the invention, which are particularly adapted to specific environments and operative requirements without departing from the principles of the present invention. The presently disclosed embodiment is therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being not limited to the foregoing description.

15
20
25

CLAIMS

What is claimed is:

1. A lateralization device for providing a lateralization effect to a body portion of a user, comprising:
5 a supporting member adapted to be supported in fixed position; and
 a lateralization member mounted onto the supporting member and expanding laterally therefrom to provide a lateralization effect;
 wherein the lateralization effect can be varied as desired.
2. The lateralization device of claim 1, wherein the supporting member
10 comprises a post member.
3. The lateralization device of claim 3, wherein the post member comprises a substantially cylindrical outer wall.
4. The lateralization device of claim 3, wherein the post member comprises a plurality of interference fittings on the outer wall for engaging with complementary
15 interference fittings formed on an inner wall of the lateralization member.
5. The lateralization device of claim 1, wherein the lateralization member is formed of a material that can resist a pressure exerted thereon and maintain its initial shape during a normal use.
6. The lateralization device of claim 1, wherein the lateralization member
20 comprises a substantially cylindrical member with a recessed portion formed by an inner wall.
7. The lateralization device of claim 6, wherein the cylindrical member has a substantially circular cross-section.
8. The lateralization device of claim 6, wherein the recessed portion is located
25 in an eccentric position on the cylindrical member.

9. The lateralization device of claim 6, wherein the lateralization member comprises a plurality of interference fittings formed on the inner wall for engaging with complementary interference fittings formed on the supporting member.

5 10. The lateralization device of claim 1, wherein the lateralization member comprises a padding member.

11. The lateralization device of claim 4,
wherein the lateralization member is provided with a recessed portion formed by an inner wall; and
wherein a plurality of interference fittings are formed on the inner wall for
10 engaging with complementary interference fittings formed on the outer wall of the supporting member;
whereby the lateralization member can rotate in relation to the supporting member.

12. The lateralization device of claim 11, wherein the lateralization member
15 can rotate in one direction in relation to the supporting member.

13. The lateralization device of claim 11, wherein the recessed portion is located in an eccentric position on the cylindrical member.

14. The lateralization device of claim 1 further comprising a padding member, the padding member is an elongated member and adapted to wrap around the
20 lateralization member for more than one time.

15. The lateralization device of claim 1 further comprising a protection member at least partially wrap around the lateralization member.

16. A lateralization device for providing a lateralization effect to a user's body portion during a medical procedure, comprising:
25 a supporting member adapted to be supported in fixed position; and
a lateralization member supported by the supporting member and extending transversely therefrom to exert a lateralization vector force to a user's body portion and provide a lateralization effect to the user's body portion;

wherein lateralization member maintains the lateralization effect throughout the medical procedure.

17. The lateralization device of claim 16, wherein the lateralization member provides a lateralization effect to a user's hip joint in a hip arthroscopy.

5 18. The lateralization device of claim 16, wherein the supporting member is adapted to be mounted onto a fracture table.

19. A method for providing a lateralization effect to a user's body portion in a medical procedure, comprising:

10 providing a lateralization vector force to position the user's body portion in a desired relationship for the medical procedure; and
maintaining the position of the user's body portion throughout the medical procedure.

20. The method of claim 19, wherein the lateralization vector force is exerted on the user's hip portion in a hip arthroscopy to provide a hip lateralization.

15

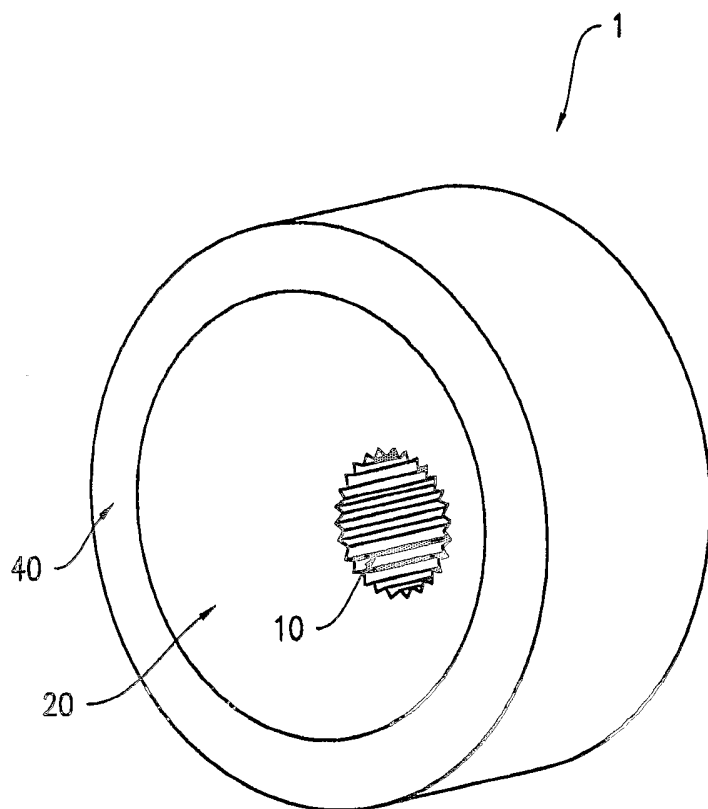


FIG. 1

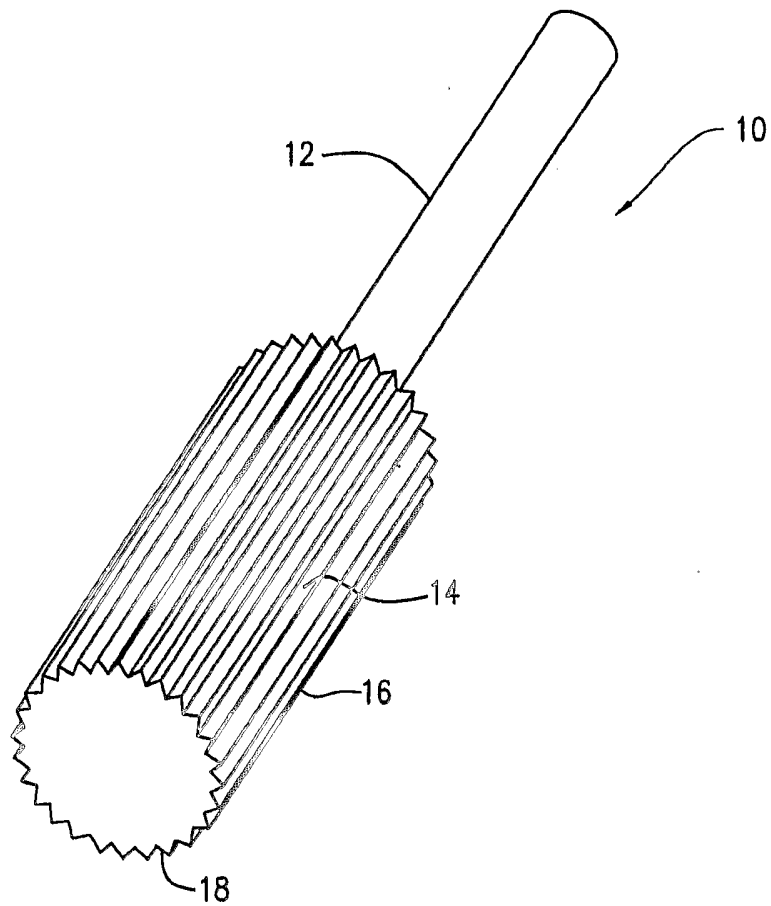


FIG. 2

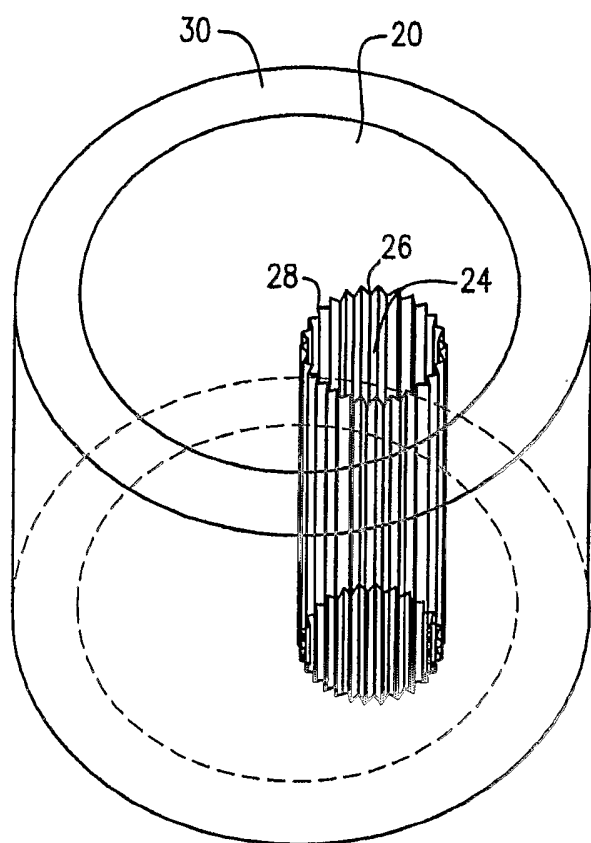


FIG. 3

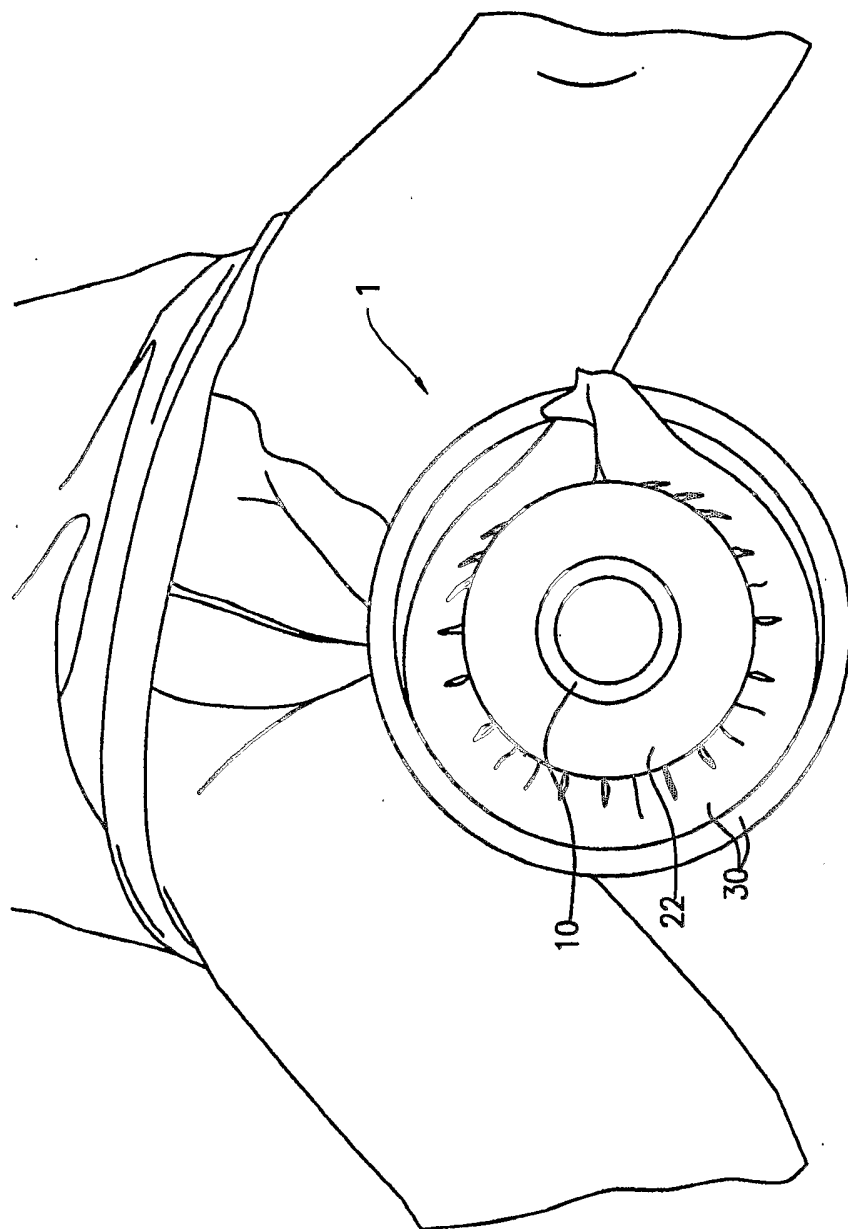


FIG. 4

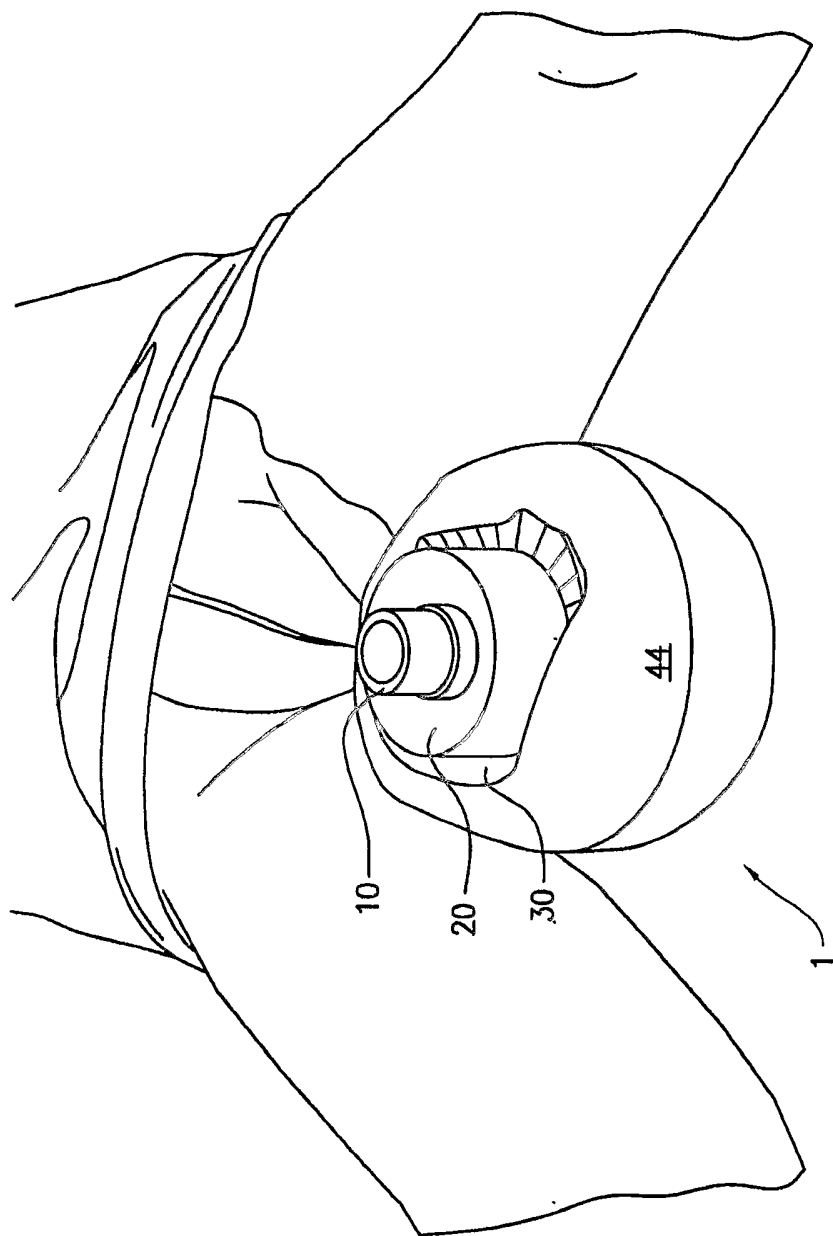


FIG. 5

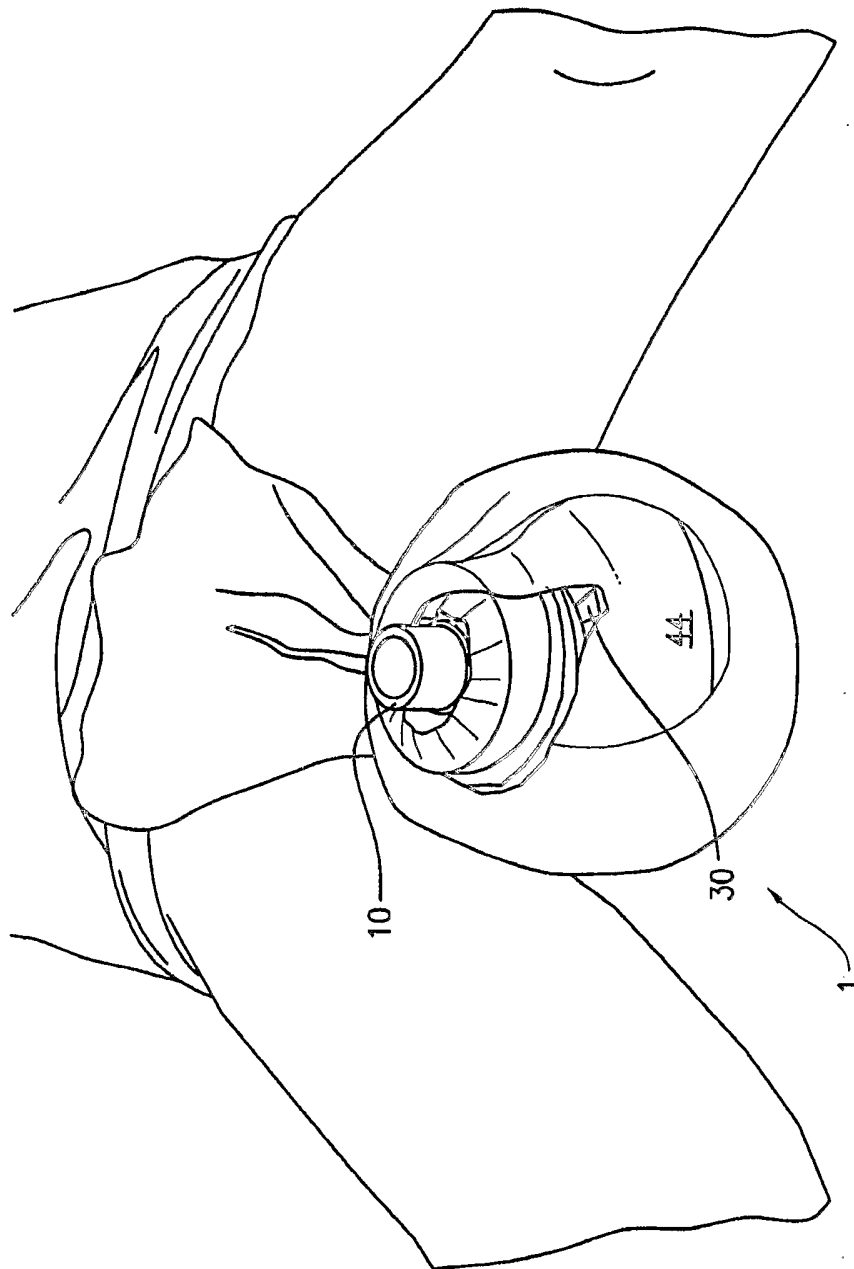


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2004/000360

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁷ A61G13/00, A61F5/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷ A61G13/00~13/12, A61F5/30, 5/32, 5/34, 5/37

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Chinese patent document (1985~2003)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5515562 (Health Care Solutions) 14 May 1996 (14. 05. 1996) the whole document	1~18
A	US, A, 5908397 (Cascade Orthopedic Supply) 1 June 1999 (01. 06. 1999) the whole document	1~18
A	US, A, 6286164 (Orthopedic Systmes. Inc.) 11 September 2001 (11. 09.2001) the whole document	1~18
A	GB, A, 2301536 (Yee, Man Liu) 11 December 1996 (11.12.1996)	1~18

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
24 June 2004 (24.06.2004)

Date of mailing of the international search report

15 · JUL 2004 (15 · 07 · 2004)



Name and mailing address of the ISA/CN
6 Xitucheng Rd., Jimen Bridge, Haidian District,
100088 Beijing, China
Facsimile No. 86-10-62019451

Authorized officer

Huang Fei

Huang Fei

Telephone No. 86-10-62085868

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/CN2004/000360

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	the whole document; figure 6 GB, A, 2111834 (American Sterilizer Company) 13 July 1983 (13.07.1983)	1~18
A	the whole document ; GB, A, 2174604 (Mathew Newton) 12 November 1986 (12.11.1986) the whole document;	1~18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2004/000360

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos: 19, 20
because they relate to subject matter not required to be searched by this Authority, namely:
claims 19, 20 relate to a method for providing a lateralization effect to a user's body portion in a medical procedure, which is one step of a medical procedure, so the subject matter of claims 19, 20 does not require an international search and examination according to the PCT Rule 39.1 (iv).

2. Claims Nos.:

3. Claims Nos:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2004/000360

Patent document cited in search report	Publication date	Patent family Members	Publication Date
US, A, 5515562	14.05.1996	None	
US, A, 5908397	01.06.1999	None	
US, A, 6286164	11.09.2001	None	
GB, A, 2301536	11.12.1996	JP, A, 8336551	24.12.1996
GB, A, 2111834	13.07.1983	DE, A, 3241029	23.06.1983
		FR, A, 2518400	24.06.1983
		GB, B, 2111834	05.06.1985
		CA, A, 1207368	08.07.1986
		DE, C, 8336551	11.06.1987
		US, A, 4872656	10.10.1989
GB, A, 2174604	12.11.1986	GB, B, 2174604	12.11.1986